

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Strength graded finger jointed structural timber GLT®

according to the product specification listed in the current addendum to this certificate produced by

Company

HASSLACHER HOLDING GMBH

Feistritz 1

AT-9751 Sachsenburg

and produced in the manufacturing plant

Hasslacher Preding Holzindustrie GmbH

Wohlsdorfer Straße 1, AT-8504 Preding

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in the ETA

ETA-13/0644

under system 1 being certified for the performances set out in this certificate are applied and that the construction product fulfils all the prescribed requirements for these performances.


Certificate number: 1359-CPR-0674

Date of first issue: 29.02.2016

Date of issuance: 10.10.2017

This certificate will remain valid as long as the ETA is valid and the manufacturing conditions in the plant or the factory production control itself are not modified significantly, unless suspended or withdrawn by the product certification body.

For the validity of this certificate see www.holzforchung.at.

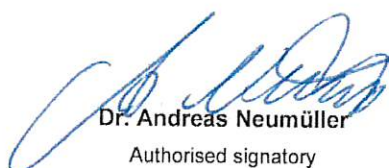

Dr. Andreas Neumüller
Authorised signatory



Dr. Manfred Brandstätter
Head of the Certification Body

Addendum to certificate 1359–CPR-0674

Date of issuance: 10.10.2017

Scope of certification for the following products:

**Strength graded finger jointed structural timber GLT® – Solid, tension proof loaded,
structural timber beams GLT®_{MONO}**

Timber species/ Strength classes:	PCAB – spruce, ABAL – fir; C 24
Mechanical resistance:	according to ETA-13/0644
Services classes:	NK 1, NK 2
max. dimension:	Spruce / Fir: 140 x 240 mm ² or 33.600 mm ²
Manufacturing of finger joints:	According to EN 15497
Finger joint profile:	15 / 3,8 / 0,42 mm
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Reaction to fire	D-s2, d0
Formaldehyde class:	E1
Natural durability class:	According to EN 350-2
Applied tension stress:	50 % to 75 % of ft,0,k
Minimum duration of applied tension stress:	≥ 1,5 seconds