

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Structural finger jointed solid timber

according to the product specification listed in the current addendum to this certificate placed on the market by

Company

NORITEC HOLZINDUSTRIE GMBH

Feistritz 1

AT-9751 Sachsenburg

and produced in the manufacturing plant

AT-9751 Sachsenburg, Feistritz 1

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 15497:2014

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

CERTIFICATE OF CONSTANCY OF PERFORMANCE


Certificate number: 1359-CPR-0791

Date of first issue: 06.05.2019

Date of issuance: 06.05.2019

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforchung.at.

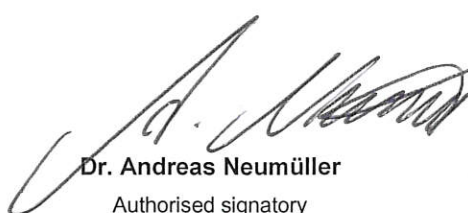

Dr. Andreas Neumüller
Authorised signatory



Dr. Manfred Brandstätter
Head of the Certification Body

Addendum to certificate 1359-CPR-0791

Date of issue: 06.05.2019

Scope of certification for the following products:

STRUCTURAL FINGER-JOINTED SOLID TIMBER

| | |
|----------------------------------|--|
| Timber species/strength classes: | PCAB – spruce, ABAL – fir, PNSY – pine: C24 |
| Services classes: | 1, 2 |
| Mechanical resistance: | according to EN 338 |
| max. dimension: | |
| - Spruce | 100 x 240 mm ² |
| - Pine | 80 x 240 mm ² |
| Adhesive: | |
| - Finger joints | Type I: MUF according to EN 301 |
| Reaction to fire: | D-s2, d0 |
| Formaldehyde class: | E1 |
| Natural durability class: | according to EN 350-2 |