

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

**Glued laminated timber (glulam)
Glued solid timber
Block glued glulam**

according to the product specification listed in the current addendum to this certificate placed on the market

Company

HASSLACHER HOLZBAUSYSTEME GMBH

Feistritz 1

AT-9751 Sachsenburg

and produced in the manufacturing plant

AT-9620 Hermagor, Kühweg 35

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14080:2013

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

CERTIFICATE OF CONSTANCY OF PERFORMANCE


Certificate number: 1359-CPR-0618

Date of first issue: 09.07.2015

Date of issuance: 24.08.2018

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforchung.at.

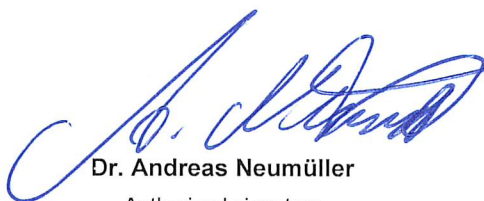

Dr. Andreas Neumüller
Authorised signatory



Dr. Manfred Brandstätter
Head of the Certification Body

Annex to Certificate 1359-CPR-0618

Date of issue: 21.08.2017

Scope of certification for the following products:

GLUED LAMINATED TIMBER (GLULAM)

Timber species/ strength classes:	PCAB - spruce; ABAL - fir: GL 20h, GL 24h, GL 24c, GL 28h, GL 28c, GL 30h, GL 30c, GL 32h, GL 32c, GL 36h HBS, GL 36c HBS LADC - larch, PNSY - pine: GL 24h, GL 24c, GL 28h, GL 28c
Mechanical resistance:	according to EN 14080
Service classes:	1, 2, 3
Adhesive:	
- Finger joints	Type I: MUF according to EN 301
- Surface bonding	Type I: MUF according to EN 301
Reaction to fire:	D-s2, d0
Formaldehyde class:	E1
Natural durability class:	according to EN 350-2

GLUED SOLID TIMBER

Timber species/strength classes:	PCAB - spruce; ABAL - fir: C 24
Mechanical resistance:	according to EN 338
Service classes:	1, 2
Max. dimension:	280 x 280 mm
Adhesive:	
- Finger joints	Type I: MUF according to EN 301
- Surface bonding	Type I: MUF according to EN 301
Reaction to fire:	D-s2, d0
Formaldehyde class:	E1
Natural durability class	according to EN 350-2

BLOCK GLUED GLULAM

Timber species:	PCAB - spruce; ABAL - fir:
Cross-sectional shape:	rectangular
Adhesive – block joint:	Type I: PRF according to EN 301 Type I: MUF according to EN 301